



# TECHNICAL INFORMATION SHEET

## NE4-CL2 Electrochemical Chlorine (Cl<sub>2</sub>) Gas Sensor

Nemoto & Co., Ltd.  
Sensor Division  
4-10-9, Takaido-higashi,  
Suginami-ku, Tokyo,  
JAPAN

### General Description

The NE4-CL2 is a new electrochemical gas sensor with 3 electrodes for the detection of Chlorine gas (Cl<sub>2</sub>) in a variety of gas detection applications. Exhibiting high performance with long-term stability, this compact (20.4mm dia) sensor is suitable for portable Gas Detection Instruments or Fixed Gas Detection heads alike.

Nemoto's porous electrode technology enables accurate gas detection with high sensitivity. The mechanical design of the sensor gives optimum gas diffusion characteristics, and the hermetically sealed enclosure prevents costly electrolyte leakage.



### Specifications:

Detectable Gas	Chlorine (Cl <sub>2</sub> )
Detection Range	0-10 ppm
Maximum overload	50 ppm
Output Current	600 +/- 150 nA/ppm
Reproducibility (same day)	+/- 2%
Zero in clean air	< +/- 0.2ppm Cl <sub>2</sub>


#### **Long term drift:**

Zero	< +/- 0.2ppm / Year
Span	< 2% Signal / Month
Response time (T <sub>90%</sub> )	< 40 seconds
Temperature drift (zero)	< +/- 0.5ppm (-20°C to +50°C)
Expected lifetime	> 2 years
Temperature Range:	-20°C to +50°C
Humidity range (constant)	15-90% RH
Humidity range intermittent)	0-99% RH
Pressure	0.9 - 1.1 atm
Recommended load resistor	10 Ω
Storage time	6 months

(Without compromising lifetime)

Test data on drift, poisoning, temperature performance, linearity are available on the Characterisation Document.

### Temperature response

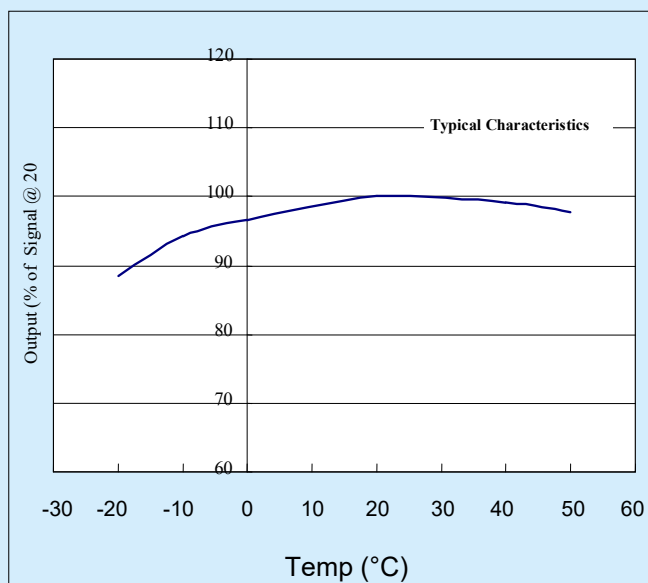

Nemoto has a policy of continuous development and improvement of its products. As such the specification for the device outlined in the data sheet may be changed without notice

ne4-cl2.ppp, issue 6, January 2019

#### Contact Information:

Europe & Africa Area  
Asia Area  
Americas Area

#### Website

www.nemoto.eu  
www.nemoto.co.jp  
www.nemoto.eu

#### email


eusensor@nemoto.co.jp  
sensor2@nemoto.co.jp  
nasensor@nemoto.co.jp

#### Telephone

+44 (0)1799 543968  
+81 3 3333 2760  
+1 604 761 7363



## Dimensions:

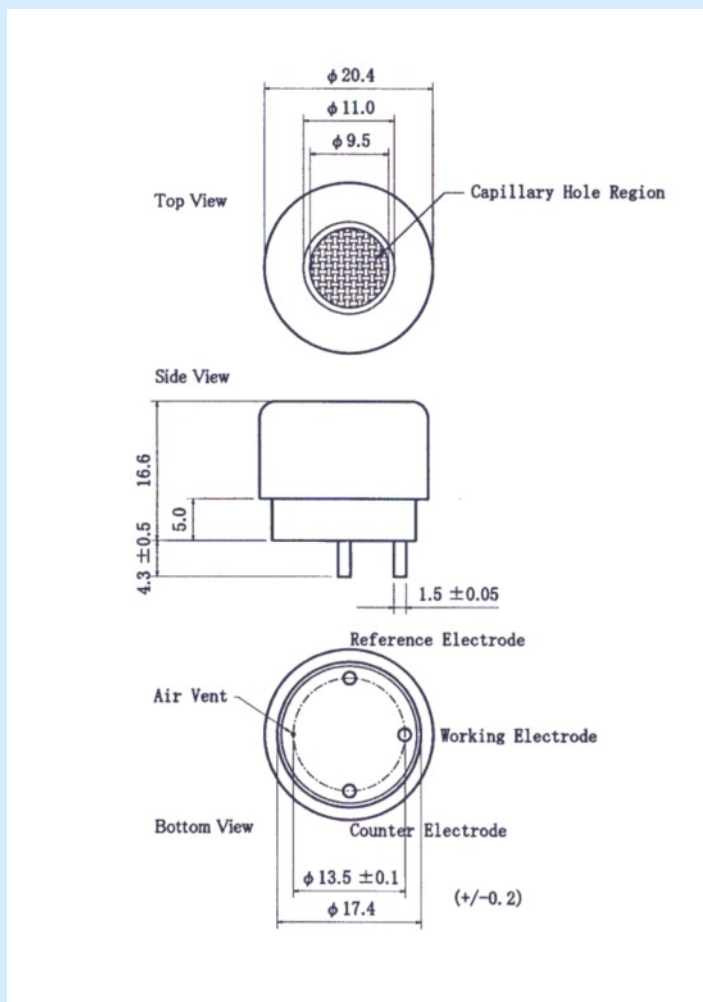

## Typical Cross-Sensitivities:

Gas	% Cross-sensitivity
Chlorine	100
Carbon Monoxide	< -10
Hydrogen	< -5
Methane	0
Carbon Dioxide	0
Sulphur Dioxide	< -100
Nitric Oxide	< 20
Nitrogen Dioxide	100
Ammonia	0
Ethanol	< 1
Ethylene	0
Hydrogen Sulphide	< -400

**Note: The output signal of the NE4-CL2 sensor is of negative polarity compared to (for example) CO and H<sub>2</sub>S sensors.**

Test data on drift, temperature performance, linearity etc are available on the Characterisation Document.

Nemoto has a policy of continuous development and improvement of its products. As such the specification for the device outlined in the data sheet may be changed without notice

ne4-cl2.ppp, issue 6, January 2019

### Contact Information:

Europe & Africa Area

Asia Area

Americas Area

### Website

[www.nemoto.eu](http://www.nemoto.eu)

[www.nemoto.co.jp](http://www.nemoto.co.jp)

[www.nemoto.eu](http://www.nemoto.eu)

### email

[eusensor@nemoto.co.jp](mailto:eusensor@nemoto.co.jp)

[sensor2@nemoto.co.jp](mailto:sensor2@nemoto.co.jp)

[nasensor@nemoto.co.jp](mailto:nasensor@nemoto.co.jp)

### Telephone

+44 (0)1799 543968

+81 3 3333 2760

+1 604 761 7363